




**extruflex**  
flexible vinyl technologies



**FINE VINYL**

**WINDOW, DOOR AND PARTITION**

# WORLD LEADER IN EXTRUSION OF SOFT VINYL, EXTRUFLEX DEVELOPS, PRODUCES AND DISTRIBUTES STRIPS, SHEETS AND SOFT TRANSPARENT FILMS.

With over 65 years of experience gained in France and internationally, we manage interactions with our customers in order to provide you with concrete solutions to meet your existing and future challenges.

Extruflex has 3 production sites and 8 sales subsidiaries around the world.

## QUALITY, COMMITMENT AND SERVICE INFLUENCE AND DRIVE OUR ACTIONS IN EVERYDAY LIFE.

### /// TECHNICAL CHARACTERISTICS



Recycling of your production wastes



Transparency




Non-sticky



Weldability



Complying with the European REACH regulation



Low shrinkage



Low-loss at the end of roll



UV resistant



Eco-friendly policy




Fire retardant M2/B1



Cold resistance



No Watermarks



Cutting service to dimension

# /// RANGE OF PRODUCTS

Product	Width	Length	Thickness	m <sup>2</sup> /roll
<b>Standard Anti-UV (3S)</b>	1400 mm	65 m	0.3 mm	91
	1400 mm	40 m	0.5 mm	56
	1400 mm	30 m	0.65 mm	42
	1400 mm	25 m	0.8 mm	35
	1400 mm	20 m	1.0 mm	28
<b>Fire retardand Anti-UV (M2/B1)</b>	1400 mm	65 m	0.3 mm	91
	1400 mm	40/100 m	0.5 mm	56/140
	1400 mm	25 m	0.8 mm	35
	1400 mm	20 m	1.0 mm	28
<b>Standard Anti-UV (2S) (High Temperatures)</b>	1400 mm	40 m	0.5 mm	56
	1400 mm	30 m	0.65 mm	42



**AVAILABLE ON STOCK,  
SHORT DELIVERY TIME  
GUARANTEE**

Other dimensions available on request

# /// TECHNICAL DATA

PHYSICAL PROPERTIES	TEST METHOD	UNIT	Standard Anti-UV (3S)	FR (M2/B1)	Standard Anti-UV (2S)
REFERENCE	-	-	REF425	REF690	REF436
WIDTH	-	mm	1400	1400	1400
LENGTH	-	m	20 to 65*	20 to 65*	20 to 65*
HAND	-	-	3S	3S	2S
WEIGHT / roll	-	kg	35	36	35
WEIGHT / m <sup>2</sup>	-	gr /m <sup>2</sup>	372 to 1240*	390 to 1300*	375 to 1255*
WEIGHT / m	-	gr /m	520 to 1736*	546 to 1820*	525 to 1760*
FINISH	-	-	DOUBLE POLISHED		
COLOR	-	-	CLEAR BLUE		
UV STABILIZED	-	-	YES	YES	YES
FIRE RETARDANT	NF P92-507	-	-	M2/B1	-
LOW TEMP RESISTANCE (IMPACT TEST)	ASTM D746	°C	-40 to -30*	-7 to -25*	-25 to -35*
TEAR RESISTANCE	ASTM D1004-13	N	21 to 70 (X)* 19 to 66 (Y)*	19 to 67 (X)* 17 to 65 (Y)*	23 to 78 (X)* 21 to 72 (Y)*
TENSILE STRENGTH	ISO 527-1:2012 ISO 527-3:2001	MPa	20 to 26 (X)* 25 to 29 (Y)*	18 to 23 (X)* 15 to 26 (Y)*	22 to 28 (X)* 27 to 32 (Y)*
ELONGATION AT BREAK	ISO 527-1:2012 ISO 527-3:2001	%	350 to 380 (X) <sup>9</sup> 320 to 420 (Y)*	340 to 370 (X)* 310 to 400 (Y)*	330 to 360 (X)* 310 to 390 (Y)*
HEAT SHRINKAGE (80°C, 10 min.)	DIN 53377:2007	%	0.7 (X) -2.2 (Y)	0.9 (X) -2.7 (Y)	0.5 (X) -1.9 (Y)

\*value depends of thickness

Other sizes could be provided upon request

Thickness Tolerance (±0,05mm); Width Tolerance (+10mm ; -0mm)

(X): test proceeded in the width axis


(Y): test proceeded in the length axis

The data contained in this technical specification is given for information only and is based on our current knowledge of the products concerned.

This information given to our customer in good faith to inform him and to help him in his search, does not constitute any formal or implicit guarantees as to its use.

**WE REMAIN AT YOUR DISPOSAL  
FOR ANY SPECIFIC REQUESTS**

# /// OUR APPLICATIONS

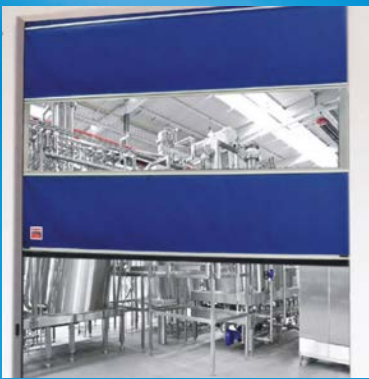

# /// OUR LOCATIONS



## **EXTRUFLEX do Brazil**

Tel. : +55 (41) 3019 2530  
contact-edb@extruflex.com

## **EXTRUFLEX France HQ**

Tel. : +33 (0)1 41 49 99 30  
contact-lvp@extruflex.com

## **EXTRUFLEX Germany**

Tel. : +49(0) 228 329 76 062  
contact-gmbh@extruflex.com

## **EXTRUFLEX Asia-Pacific**

Tel. : +86 0760 22289080  
contact-eap@extruflex.com

## **EXTRUFLEX Italy**

Tel. : +39 011 19857747  
contact-it@extruflex.com

## **EXTRUFLEX North America**

Tel. : +1 888 501 1095  
info@extruflexna.com


## **EXTRUFLEX UK**

Tel. : +44(0)1454 322 3351  
contact-uk@extruflex.com

## **EXTRUFLEX Russia**

Tel. : +7 919 990 1590  
contact-ru@extruflex.com

**FOR MORE DETAILS  
ABOUT OUR PRODUCTS**



**EXTRUFLEX.COM**



**extruflex**  
flexible vinyl technologies